




INSTALLATION GUIDE

DIMENSIONS

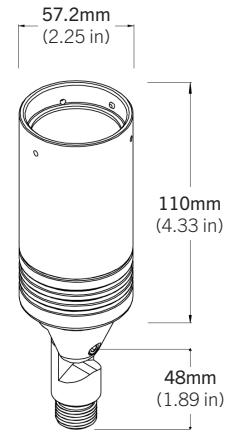

PRE-INSTALLATION

Disconnect power source prior to installation.

SAFETY

Read all instructions before installation.

These products may present a possible shock, serious injury, or death if improperly installed.

Do not cover fixture with heat insulation gasket or similar materials.



Product should be installed by a qualified electrician.



Product should be installed in accordance with these instructions and current electrical codes.



To reduce the risk of fire or overheating, all connections should be tight and secure.

INSTALLATION

STEP 1

Separate the top and bottom of the Junction Box. Feed the main power cord through the bottom hole the junction box bottom. (Figure 1)

STEP 2

Mount the junction box bottom plate to the surface of choice and secure in place with appropriate screws. (Figure 2)

STEP 3

Feed the fixture main power cord through the top hole of the junction box cap and twist clockwise to and thread the fixture. (Figure 3)

STEP 4

Connect main power cord to the source voltage line.

Figure 1

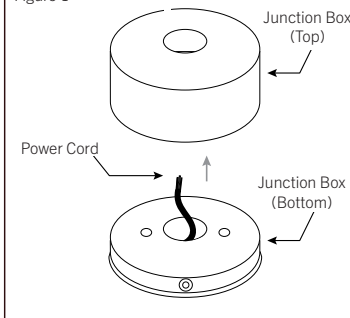


Figure 2


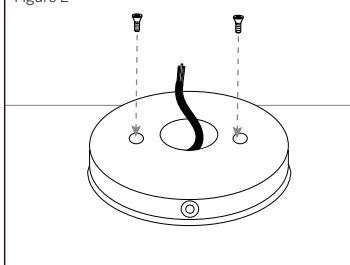


Figure 3

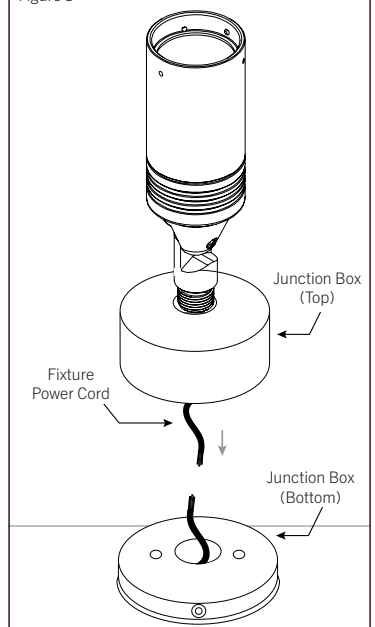

INSTALLATION

STEP 5

Connect both halves of the junction box by carefully pressing them together.

Using the provided hex key and screws, tightly secure the junction box halves. (Figure 4)

STEP 6

Using the provided allen wrench, loosen the hex screw and aim flood light in the desired direction. Tighten the hex screw to secure in place. (Figure 5)

**Do not overtighten the hex screw. Doing so will damage the O-ring seal and void the warranty.*

