

ST-100

RECESSED LED LUMINAIRE

Project _____
Location _____
Quote/ Ref # _____

The **ST-100** is a 2.5W, 24V outdoor luminaire intended for use as stair and wall lights. Illuminate paths and walkways or mount these onto walls to shine down on surface or floor. IP65 outdoor rated to withstand all weather conditions. Available in 30K and 40K, White, Black and Silver.



SPECIFICATIONS

INPUT VOLTAGE	24V DC
POWER CONSUMPTION	2.5W
LUMEN OUTPUT	48 Lumens (30K) 50 Lumens (40K)
COLOR TEMPERATURE	30K / 40K
BEAM ANGLE	120°
CRI	90+
DIMMING	ELV, 0-10V and TRIAC
OPERATING TEMPERATURE	-4°F (-20°C) ~ 104°F (40°C)
LED	OSRAM LED
MOUNTING	Recessed
IP RATING	IP65 (wet location)
FINISH OPTIONS	White / Black / Silver
CERTIFICATIONS	RoHS, ETL
LUMEN MAINTENANCE	50,000 hrs.

FEATURES

- Recessed applications
- Up to 50 lumens
- Superior Color Rendering Index (90+ CRI)
- Die-cast powder coated aluminum
- Small form factor
- Great dimming performance
- Dimmable with most ELV, 0-10V and TRIAC dimmers





MODEL	COLOR TEMP	FINISH	VOLTAGE
ST100	30K 3000K (Warm White)	WH White	24 24V DC
	40K 4000K (Cool White)	BK Black	
		SI Silver	

ST-100

RECESSED LED LUMINAIRE

DIMENSIONS

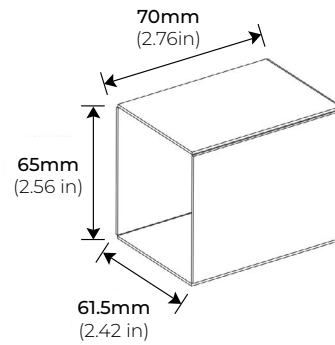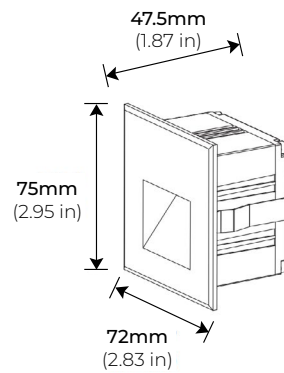

MOUNTING SLEEVE

** Included*


ST-100

RECESSED LED LUMINAIRE

COMPATIBLE TRANSFORMERS


PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.03"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.03"
PSDL-96W-24V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-24V		8.67" X 3.67" X 1.62"
PSDL-192W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

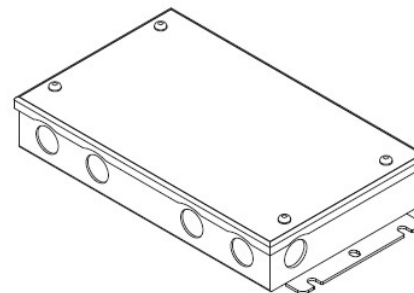


PSRX SERIES 4-IN-1 DIMMING DRIVER

PSRX-30W-24V	CLASS 2	6.5" X 3.72" X 1.57"
PSRX-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V		10.24" X 4.13" X 1.77"
PSRX-192W-24V	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V		10.24" X 4.13" X 1.77"
PSRX-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V		10.94" X 4.33" X 1.77"

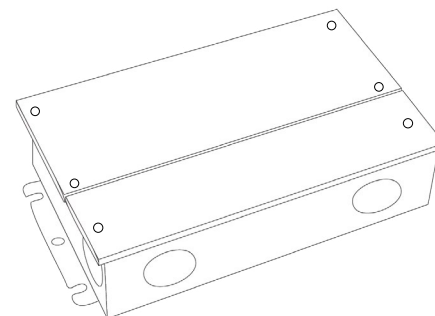


PSVT SERIES 0-10V DIMMING DRIVER

PSVT-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSVT-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSVT-200W-24V		10.24" X 4.13" X 1.77"
PSVT-288W-24V	CLASS 2	11.85" X 4.25" X 1.81"
PSVT-300W-24V		10.94" X 4.33" X 1.77"

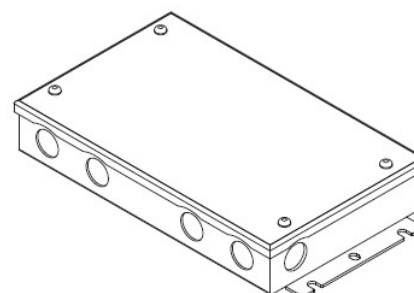

PSDE SERIES 0-10V DIMMING W/ JUNCTION BOX

PSDE-60W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"
PSDE-96W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"

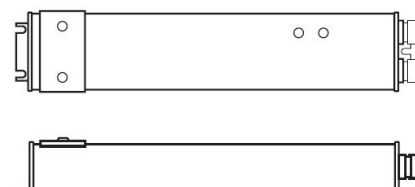


ST-100

RECESSED LED LUMINAIRE

COMPATIBLE TRANSFORMERS


LUTRON 1%
3-WIRE DIMMING

L3DA4U1UKL-CV240 CLASS 2 4.89" X 4" X 2.62"

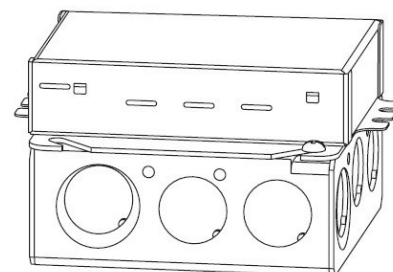

LUTRON 1%

PSDE-96W-24V-ECO CLASS 2 10.5" X 3.0" X 2.0"



COMPATIBLE NON-DIMMING DRIVERS

PSHK SERIES
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

