

IG-104-SS

RECESSED LED LUMINAIRE

Project _____
Location _____
Quote/ Ref # _____

The **IG-104-SS** is a 2.5W dimmable in-ground LED fixture designed for a wide range of indoor and outdoor applications. Delivering up to 136 lumens, it's easy to install and includes a concrete pour housing. Finished in heavy-duty stainless steel, it supports loads up to 2,000 lbs for long-lasting durability



SPECIFICATIONS

| | |
|-----------------------|------------------------------|
| INPUT VOLTAGE | 24V DC |
| POWER CONSUMPTION | 2.5W |
| LUMEN OUTPUT | 136 Lumens |
| OPERATING FREQUENCY | 50/ 60Hz |
| CRI | 90+ |
| COLOR TEMPERATURE | 3000K |
| BEAM ANGLE | 30° |
| DIMMING | ELV, 0-10 and TRIAC |
| OPERATING TEMPERATURE | -4°F (-20°C) to 122°F (50°C) |
| AMBIENT TEMPERATURE | -4°F (-20°C) to 176°F (80°C) |
| CONNECTION | 20" 18AWG Lead Wire |
| MAX LOAD | 2,000 lbs |
| IP RATING | IP67 |
| LUMEN MAINTENANCE | 50,000 Hrs. |
| HOUSING DIMENSIONS | 3.82" X 3.34" |
| FACE PLATE DIMENSIONS | 2.16" X 3.11" |
| WARRANTY | 5-Year Limited |

FEATURES

- Suitable for interior or exterior applications
- Designed for in-grade applications
- Heavy duty stainless steel finish
- Suitable for wet locations
- Dimmable




| MODEL | COLOR TEMP | FINISH | VOLTAGE |
|-------|--------------|-----------------------|---------------|
| IG104 | 30K 3000K | SS Stainless Steel | 24V 24V DC |

IG-104-SS

RECESSED LED LUMINAIRE


DIMENSIONS

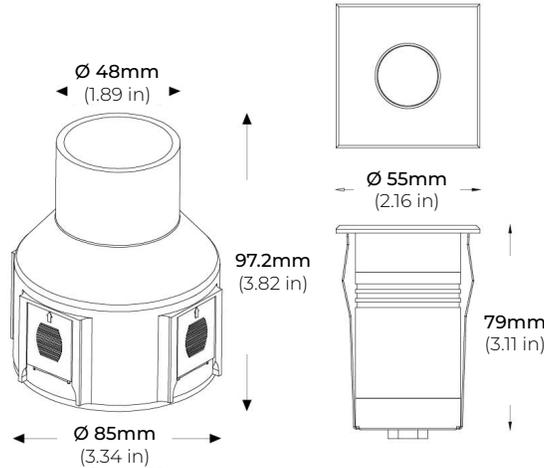

COMPATIBLE DIMMING MODULE


PSDL SERIES TRIAC DIMMABLE

| | | |
|---------------|---------|------------------------|
| PSDL-30W-24V | CLASS 2 | 6.5" X 3.63" X 1.03" |
| PSDL-60W-24V | CLASS 2 | 7.4" X 3.63" X 1.03" |
| PSDL-96W-24V | CLASS 2 | 8.67" X 3.67" X 1.62" |
| PSDL-150W-24V | | 8.67" X 3.67" X 1.62" |
| PSDL-192W-24V | CLASS 2 | 10.25" X 4.06" X 1.82" |
| PSDL-200W-24V | | 10.25" X 4.06" X 1.82" |
| PSDL-288W-24V | CLASS 2 | 10.25" X 4.06" X 1.82" |
| PSDL-300W-24V | | 10.25" X 4.06" X 1.82" |

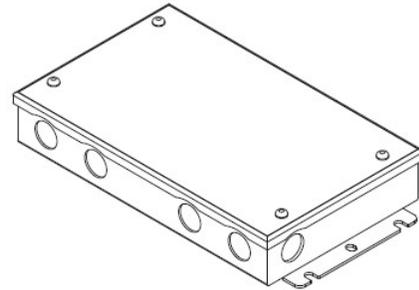


PSRX SERIES 4-IN-1 DIMMING DRIVER

| | | |
|---------------|---------|------------------------|
| PSRX-30W-24V | CLASS 2 | 6.5" X 3.72" X 1.57" |
| PSRX-60W-24V | CLASS 2 | 7.4" X 3.72" X 1.57" |
| PSRX-96W-24V | CLASS 2 | 8.66" X 3.72" X 1.57" |
| PSRX-150W-24V | | 10.24" X 4.13" X 1.77" |
| PSRX-192W-24V | CLASS 2 | 11" X 4" X 1.82" |
| PSRX-200W-24V | | 10.24" X 4.13" X 1.77" |
| PSRX-288W-24V | CLASS 2 | 11.85" X 4.25" X 1.82" |
| PSRX-300W-24V | | 10.94" X 4.33" X 1.77" |

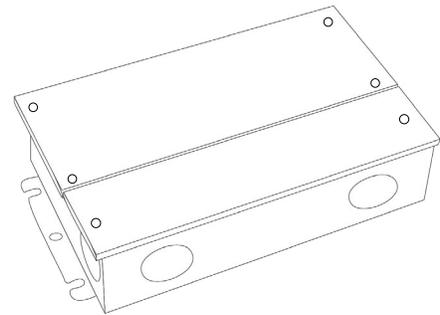

PSVT SERIES 0-10V DIMMING DRIVER

| | | |
|---------------|---------|------------------------|
| PSVT-60W-24V | CLASS 2 | 7.4" X 3.72" X 1.57" |
| PSVT-96W-24V | CLASS 2 | 8.66" X 3.72" X 1.57" |
| PSVT-200W-24V | | 10.24" X 4.13" X 1.77" |
| PSVT-288W-24V | CLASS 2 | 11.85" X 4.25" X 1.81" |
| PSVT-300W-24V | | 10.94" X 4.33" X 1.77" |

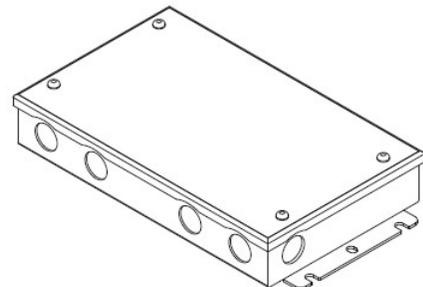

IG-104-SS


RECESSED LED LUMINAIRE

COMPATIBLE DIMMING MODULE

PSDE SERIES

0-10V DIMMING W/ JUNCTION BOX


| | | |
|---------------------|---------|----------------------|
| PSDE-60W-24V-010-JB | CLASS 2 | 12.1" X 2.36" X 1.4" |
| PSDE-96W-24V-010-JB | CLASS 2 | 12.1" X 2.36" X 1.4" |

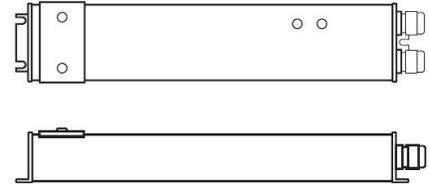

LUTRON 1%

3-WIRE DIMMING


| | | |
|------------------|---------|--------------------|
| L3DA4U1UKL-CV240 | CLASS 2 | 4.89" X 4" X 2.62" |
|------------------|---------|--------------------|

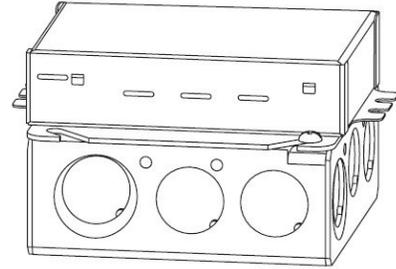

LUTRON 1%

3-WIRE DIMMING

| | | |
|------------------|---------|---------------------|
| PSDE-96W-24V-ECO | CLASS 2 | 10.5" X 3.0" X 2.0" |
|------------------|---------|---------------------|



NON-DIMMING DRIVERS (COMPATABLE WITH ALL SYSTEMS)

PSHK SERIES

NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

| | | |
|---------------|---------|------------------------|
| PSHK-30W-24V | CLASS 2 | 6.5" X 3.6" X 1.02" |
| PSHK-60W-24V | CLASS 2 | 7.4" X 3.62" X 1.02" |
| PSHK-96W-24V | CLASS 2 | 8.66" X 3.66" X 1.61" |
| PSHK-150W-24V | | 10.24" X 4.06" X 1.81" |
| PSHK-200W-24V | | 10.24" X 4.06" X 1.81" |
| PSHK-288W-24V | CLASS 2 | 11.85" X 4.25" X 1.82" |
| PSHK-300W-24V | | 10.24" X 4.25" X 1.81" |

