

WL-200

RECESSED LED LUMINAIRE

Project

Location

Quote/ Ref #

WL-200 is a 2.6W, 24V outdoor luminaire intended for use as stair and wall lights. Illuminate paths and walkways or mount these onto walls to shine down on surface or floor. IP67 outdoor rated to withstand all weather conditions. Ideal for residential and commercial applications.



SPECIFICATIONS

INPUT VOLTAGE	24V DC
POWER CONSUMPTION	1.3W
LUMEN OUTPUT	Warm White (30K) = 60 lumens Cool White (40K) = 51 lumens
COLOR TEMPERATURE	30K / 40K
BEAM ANGLE	120°
CRI	90+
DIMMING	TRIAC, MLV, and ELV
OPERATING TEMPERATURE	-4°F (-20°C) ~ 104°F (40°C)
LED	OSRAM LED
MOUNTING	Recessed
IP RATING	IP67 outdoor rated
FINISH OPTIONS	White / Black / Silver
CERTIFICATIONS	RoHS, ETL
LUMEN MAINTENANCE	50,000 hrs.

FEATURES

- Recessed applications
- Up to 60 lumens
- Superior Color Rendering Index (90+ CRI)
- Die-cast powder coated aluminum
- Available in white, black and silver
- Available in 3000K and 4000K
- IP67 outdoor rated
- Dimmable with most TRIAC, MLV and ELV dimmers




MODEL	COLOR TEMP	FINISH	VOLTAGE
WL200	30K 3000K	WH White	24 24V DC
	40K 4000K	BK Black	
		SI Silver	

WL-200

RECESSED LED LUMINAIRE

DIMENSIONS

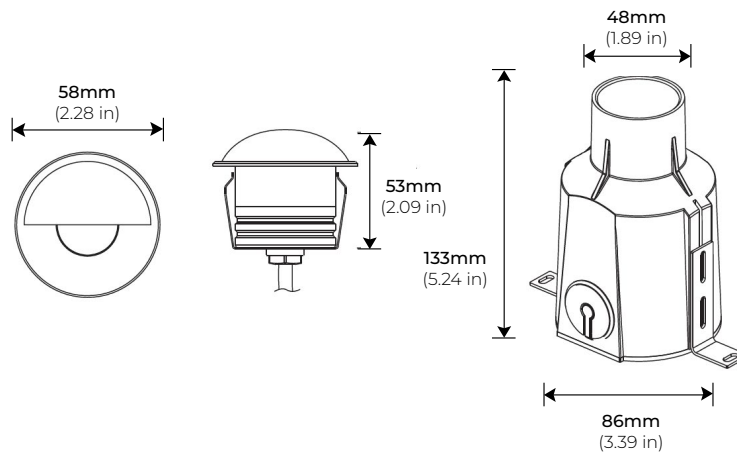

WL-200


RECESSED LED LUMINAIRE

COMPATIBLE TRANSFORMERS

PSDH SERIES

HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)


PSDH-48W-24V	CLASS 2	11.25" X 3.37" X 3.25"
PSDH-96W-24V	CLASS 2	11.25" X 3.37" X 3.25"

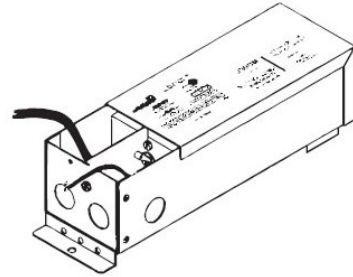

PSDE SERIES

0-10V DIMMING W/ JUNCTION BOX


PSDE-100W-24V-010-JB	CLASS 2	12.32" X 1.77" X 1.67"
----------------------	---------	------------------------

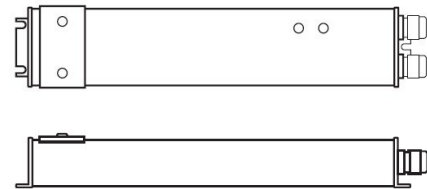


LUTRON 1%

3-WIRE DIMMING

L3DA4U1UKL-CV240	CLASS 2	4.89" X 4" X 2.62"
------------------	---------	--------------------

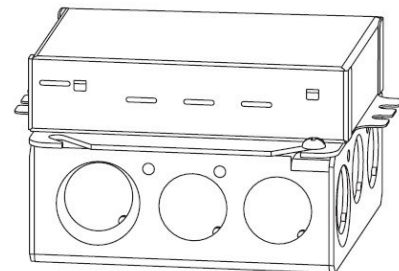

PSDE-96W-24V-ECO	CLASS 2	10.5" X 3.0" X 2.0"
------------------	---------	---------------------



WL-200

RECESSED LED LUMINAIRE

COMPATIBLE NON-DIMMING DRIVERS

PSHK SERIES

NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

